

Cavanna - pocket overview

Integrated Flow Wrapping Systems



ZERO ZERO - Flow wrapping machine

Entry level / mechatronic

Performance: 200 products/min
Foil speed: 30 m/min
Format range: Length: 60-300
Width: 15-120
Height: 10-80



ZERO 4 - Flow wrapping machine

Middle speed / servo assisted

Performance: 350 products/min
Foil speed: 40 m/min
Format range: Length: 55-350
Width: 25-200
Height: 18-80



ZERO 5 - Flow wrapping machine

High speed / servo assisted

Performance: 1000 products/min
Foil speed: 100 m/min
Format range: Length: 50-600
Width: 30-210
Height: 5-140



ZERO 5 NKZ - Flow wrapping machine

For products on edge / servo assisted

Performance: 250 products/min
Foil speed: 70 m/min
Format range: Length: 60-280
Width: 35-100
Diameter: 35-70
Height: 30-70



ZERO 5 R - Flow wrapping machine

For special application / servo assisted


Performance: 200 products/min
Foil speed: 70 m/min
Format range: Length: 50-600
Width: 30-210
Height: 5-140



Feeding and distribution systems



Feeding / Accumulating / Stacking / Loading

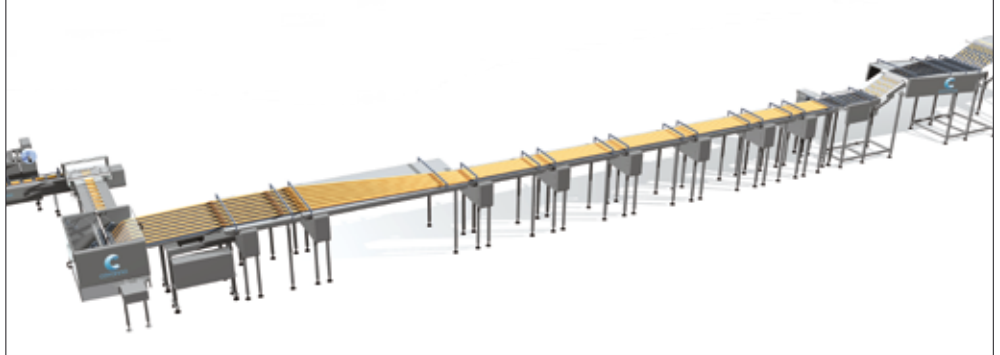

Grouping units



Biscuit loaders (SBF / MAF)



Biscuit feeders (TND)



Buffer



Performance:
In: 110 rows/min - Out: 130 rows/min

Robotics



G35 model
Performance:
650 products/min







G41 model
Performance: 400 products/min



Performance:
In: 130 rows/min - Out: 50 rows/min

Cavanna Group:

-  Headquarters - Italy
www.cavanna.com - sales@cavannagroup.com
-  Branch - Brazil
www.cavanna.com/bra - vendas@cavannagroup.com
-  Branch - USA
www.cavanna.com/usa - cavanna.usa@cavannagroup.com
-  Branch - Germany
www.cavanna.com/d - cavanna.germany@cavannagroup.com



The above-mentioned data aren't binding. We have the right to change the specifications of the products without notice.